



HDP 1850G

High Definition PowerCenter™

PowerCenter™ Haute Définition

Owner's Manual | Manuel du propriétaire

TABLE OF CONTENTS

Page

Important Safety Information	i
Proper Grounding and Installation	1
A Note from The Head Monster	2
Monster GreenPower™	4
Monster CleanPower® Filtering	5
Monster T2™ Technology	6
Advanced Tri-Mode® Surge Protection	7
The Minds Behind The Monster PowerCenter™ Design	8
Monster HDP1850G PowerCenter™ Features	9
Hook-Up Guide	
High Definition Digital Outlets	12
Digital Outlets	13
Ultra-High Current Audio PLC-Compatible Outlets	14
Monster GreenPower™ Outlets	15
GreenPower™ Outlet Management Operation	16
RF Remote Control Syncing	18
Coaxial Connections	19
Phone and Network Connections	20
Troubleshooting	21
Specifications	24
Warranty Information	25

IMPORTANT SAFETY INFORMATION

Please read and observe the following safety points at all times.

⚠ WARNING – Power Sources

Do not plug this PowerCenter™ into a power outlet that differs from the source indicated for safe use on the PowerCenter. If you don't know the type of electrical power that is supplied to your home, consult your local power company or a qualified electrician.

⚠ WARNING – Grounding and Polarization

- A. Do not force your PowerCenter plug into an outlet that is not designed to accept a three-wire grounded-type AC plug (a three-prong plug). This plug is designed to be inserted into a grounded-type outlet only. If this plug doesn't fit directly inside your outlet, do not attempt to force it into the outlet. Never attempt to dismantle the plug in any way (or to alter the power cord). Do not attempt to defeat the grounding feature by using a 3-to-2 prong adapter. If you have questions about grounding, consult your local power company or a qualified electrician.
- B. If you use rooftop devices such as satellite dishes, antennas, or any other component with wire that connects to your PowerCenter, be sure the wire(s) is properly grounded. This protects against voltage surges and static charges.
- C. Do not place any antenna near overhead power lines or any other power circuit. Do not touch any power line or power circuit. Doing so may cause severe physical injury or possibly death.

⚠ WARNING – Liquid: Avoiding Electrical Shocks

- A. Do not operate your Monster PowerCenter if liquid of any kind is spilled onto or inside the unit.
- B. Do not operate your Monster PowerCenter near rain or water that's spilled or contained (e.g., bathtub, kitchen or sink).

WARNING – Power Cord Safety

- A. When routing your PowerCenter's AC power cord, do not place it near heavy foot traffic areas (e.g., hallways, doorways, and floors). Do not create a trip hazard with the power cord.
- B. If your power cord's protective jacket begins to rip or fray, exposing the internal wiring, shielding, etc., disconnect it from the AC power source and discontinue use of the Monster PowerCenter immediately. See the Warranty Information section of this owner's manual for important details.

WARNING – No User Serviceable Parts Inside

If, for any reason, your PowerCenter is not operating properly, do not remove any part of the unit (cover, etc.) for repair. Unplug the unit and consult the Warranty Information section of this owner's manual for important details.

CAUTION – Exposure To Heat

Do not expose your PowerCenter to direct sunlight or place it near wall heaters, space heaters, or any enclosed space prone to temperature increase.

CAUTION – Proper Cleaning

In general, the only cleaning necessary for your Monster PowerCenter is a light dusting. Unplug the PowerCenter from the wall outlet before cleaning it. Do not use any type of liquid or aerosol cleaners.

⚠ CAUTION – To reduce the risk of electric shock, use only indoors and in dry locations. Do not allow the device to be exposed to moisture, rain, dust, excessive heat or direct sunlight.

⚠ CAUTION – Connect this device to a 3-prong-grounded outlet. Make sure the circuit branch is protected and not servicing equipment requiring heavy electricity.

NOTE: This equipment has been tested and complies with Part 15 of the FCC rules.

Operation is subjected to the following conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation

PROPER GROUNDING AND INSTALLATION

⚠ WARNING – Proper Grounding

Monster PowerCenters require a properly grounded outlet for safety and to protect connected equipment. If you're not sure if your home's electrical wiring is properly grounded, have it checked by a qualified electrician.

Important Note – Proper Power and Protection

To completely protect your equipment against electrical surges, every AC power cable coaxial cable, network line, and phone line in the system must be connected to an appropriate PowerCenter outlet or port.

Important Note – Proper Protection and the Limited Connected Equipment Warranty

The U.S. \$400,000 Limited Connected Equipment Warranty becomes invalid if any wire (AC, coax, phone or network) or audio or video interconnect leading into the equipment comes from a component that is not properly protected by the PowerCenter. See the Warranty Information section of this owner's manual for important details.

A NOTE FROM THE HEAD MONSTER

THANK YOU for purchasing the Monster Power® High Definition PowerCenter HDP 1850G. This PowerCenter is designed to save energy costs by eliminating stand-by mode power consumption. It also provides advanced power protection to keep your valuable home theater equipment safe from dangerous power conditions, and features power filters specially tuned for high definition AV components.

To address growing concerns about the waste and cost of stand-by or sleep mode energy use, the 1850G features Monster GreenPower™ switched outlets that automatically shut off to eliminate the drain of "vampire" power. GreenPower outlets substantially reduce energy wasted by HDTVs, DVD/Blu-ray™ Disc players, subwoofers, and other components in stand-by mode. In addition, two GreenPower RF Control outlets are provided that can be switched off by remote control, making it even easier to save energy and money.

Other Monster Power breakthroughs include exclusive T2™ automatic disconnect protection circuitry and patented Tri-Mode™ protection featuring an audible alarm. Tri-Mode automatically disconnects equipment from both live power lines (line and neutral) and sounds an alarm. Microprocessor-controlled T2 takes protection a step further. T2 works with Tri-Mode circuitry to automatically disconnect both the PowerCenter itself and your equipment from both live power lines (line and neutral) when a dangerous surge or spike hits.



Noel Lee

Patented Monster HD Clean Power™ is specifically designed for today's high definition home theater components. Its filters are precision-engineered to virtually stop the electromagnetic and radio frequency noise that goes right through typical surge protectors. This advanced technology reduces stress on delicate digital circuitry, maximizing the lifespan of connected equipment and delivering improved performance.

These days, AV components are better than ever, providing thrilling surround sound and razor sharp HD picture. With Monster Power, you'll have peace of mind knowing your home theater investment is protected and that you're getting all the performance you paid for, while saving money and energy with GreenPower.



Noel Lee,
The Head Monster


MONSTER GREENPOWER™ OUTLET MANAGEMENT

Monster GreenPower™ is a revolutionary new way to automatically reduce energy waste and save money. Simply plug your HDTV or AV receiver into the Monster GreenPower Control outlet. When it's turned off or goes to sleep, the Monster GreenPower outlets switch off, automatically eliminating energy wasted by your subwoofer, DVD player, and more. When your computer or device turns back on, the GreenPower outlets automatically power up again.



MONSTER GREENPOWER™ RF CONTROLLED OUTLETS

GreenPower RF Controlled Outlets provide another way to reduce energy wasted by your equipment in stand-by mode. Two high current outlets can be turned on or off with the wireless radio frequency remote control included.

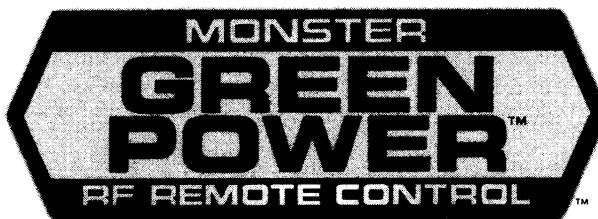


Please see page 16 for important information on GreenPower operation.

PATENTED MONSTER CLEAN POWER® FILTERING


Your home's electricity is full of noise and interference caused by all of your appliances and electronics: cell phones, computers, even your lights, all contribute to the problem. This "dirty power" stresses the delicate digital circuitry inside HDTVs and other home theater equipment, reducing their performance and potentially shortening their lives.

However, ordinary surge protectors can't remove the effects of dirty power. The HDP 1850G features HD Clean Power filtering that is precision-engineered to remove electrical noise and interference. This protects the delicate digital circuitry inside your HDTV and other electronics from unnecessary wear. HD Clean Power maximizes your equipment's lifespan and ensures the best possible picture and sound performance.

To learn more about patented Monster Clean Power and the complete product family of PowerCenters, voltage stabilizers and amplifiers, please visit **MonsterPower.com**.

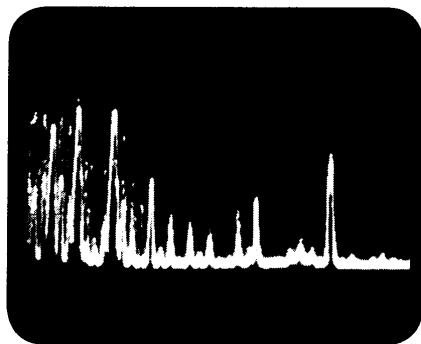

Actual spectrum analyzer
photo of AC power pollution

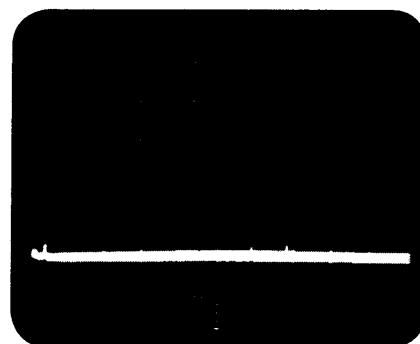

AC power line filtered by
Monster Clean Power®

PATENTED MONSTER T2™ TECHNOLOGY

The Monster HDP1850G features exclusive Monster T2™ technology. T2 is an active electronic microprocessor-controlled circuit that sits in front of the surge protection circuitry in select Monster Power products. T2 monitors the line, neutral and ground lines and automatically disconnects the PowerCenter from the AC power line when a long duration low-voltage sag or high-voltage swell occurs (continuous voltage below 80Vrms or above 132Vrms).

When the voltage sags or swells to these potentially damaging levels, ultra-fast T2 auto-disconnect protection circuitry shuts down the Monster PowerCenter for 15 seconds. When the under-voltage or over-voltage condition returns to normal, T2 reconnects the PowerCenter to the electricity and resets to full operation after 15 seconds. If the power fault condition does not clear, the T2 comparator circuit keeps the unit shut down.

Unlike ordinary power management devices, T2 will shut down your PowerCenter before the MOVs (Metal Oxide Varistors) and thermal fuses sense an overload condition and sacrifice themselves to protect your connected components. This will extend the PowerCenter's life, while providing the system protection you need.




ADVANCED TRI-MODE® SURGE PROTECTION

For added protection against more powerful overloads, patented Monster Tri-Mode® automatically disconnects your equipment and sounds an alarm.


Tri-Mode protects against surges and spikes on all three power lines (line, neutral, and ground) for a triple layer of safety. Only Tri-Mode offers this level of protection.



THE MINDS BEHIND THE MONSTER POWERCENTER® DESIGN

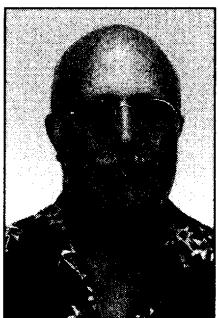


Richard Marsh – Richard developed Monster's patented Clean Power™ circuitry, and is also responsible for several other groundbreaking designs including the high-end audio balanced circuit design, the MultiCap internal bypass capacitor, and the Servo-DC feedback concept in power amplifiers – a concept that is used by virtually every amplifier manufacturer today.



Demian Martin – Demian helped create several innovative AC power solutions. He was the co-founder of Spectral Audio and was the chief designer of their many pioneering designs for amplifiers, D/A converters, and other high-end audio designs. He now brings his expertise to Monster Power's elite research and development team.




Noel Lee – Noel Lee, The Head Monster, is best known for popularizing the concept of high performance audio cable 25 years ago with his creation of Monster Cable. Originally a laser-fusion design engineer at Lawrence Livermore National Laboratory and later a touring musician, Noel has invented or co-invented over 250 U.S. and international patents. Monster Power is Noel's realization of a long-nurtured vision of making affordable power solutions that deliver the best possible sound and picture.




Tony DiChiro was one of the founders of Kinergetics Research in 1971. Kinergetics developed numerous patented technologies that advanced the state of the art in audio technology, and released highly acclaimed home theater products. Kinergetics also debuted the first high-end surround sound processor with THX certification. Tony currently heads up the R&D team at Monster Cable where he continues to develop advanced products with cutting edge features.

MONSTER HDP 1850G POWERCENTER FEATURES


HDP 1850G
FRONT VIEW

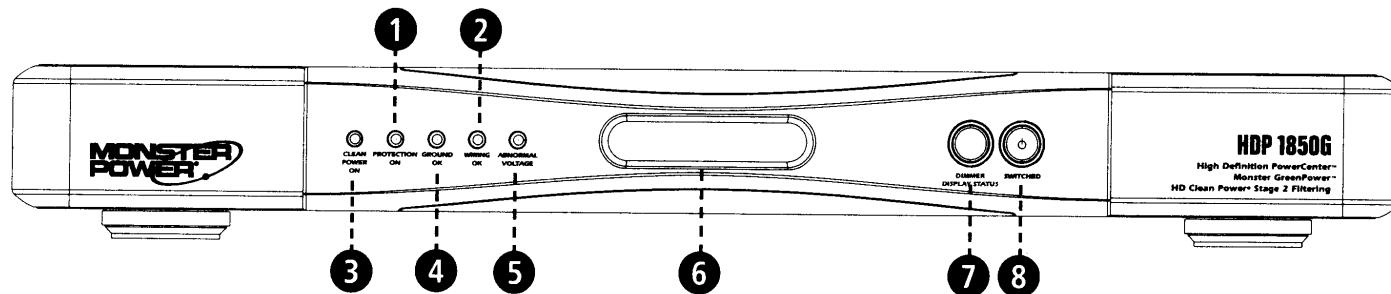

HDP 1850G
REAR VIEW

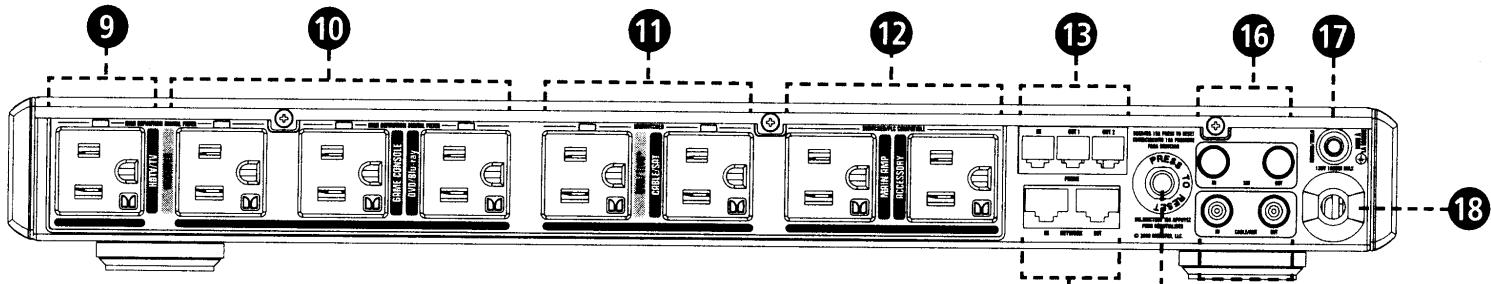

RF REMOTE
CONTROL

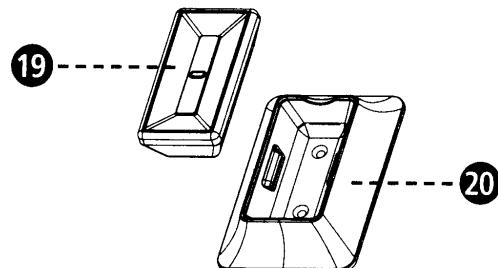

HDP 1850G POWERCENTER FEATURES

FRONT

1. "Protection On" Indicator: Indicates that the PowerCenter's surge protection is turned on.
2. "Wiring OK" Indicator: Indicates if the Line and Neutral wires from the wall outlet to the PowerCenter are reversed. Please consult your electrician to correct this immediately.
3. "Clean Power On" Indicator: Indicates Monster Clean Power circuitry is functioning properly.
4. "Ground OK" Indicator: Indicates the PowerCenter is plugged into a properly grounded 120V AV outlet.
5. Abnormal Voltage Indicator: Indicates that input voltage is above or below the acceptable range.
6. Digital Display for Voltage and Wattage: Indicates input voltage and wattage.
7. Display Dimmer Button: (a) Controls brightness of front panel displays. (b) Press and hold for three seconds to switch display status between voltage and wattage. (c) Press and hold for ten seconds to turn GreenPower Outlet Management Control On or Off.
8. On/Off Button: for Switched RF Outlets.

REAR

9. Monster GreenPower™ Control Outlet (unswitched): This High Definition Digital Filter outlet controls the GreenPower Controlled (switched) Outlets.
10. Monster GreenPower Controlled Outlets: These High Definition Digital Filter outlets are controlled by the GreenPower Control Outlet. If GreenPower Outlet Management is turned Off, these outlets are unswitched.

11. Digital Filter (unswitched outlets): These outlets have a specially designed filter circuit that reduces interference to your digital components.
12. Ultra-High Current Audio Filter RF Controlled Outlets (Switched Outlets): These outlets have a specifically designed filter circuit for high power audio components like amplifiers and pre-amplifiers. These outlets are also PLC compatible for use with home networking systems.
13. Phone Line Surge Suppression: Provides surge protection against damaging voltage surges and spikes from the phone line.
14. Network Line Surge Suppression: Provides surge protection against damaging voltage surges and spikes from the network line.
15. Input AC Circuit Breaker: Provides protection for prolonged or excessive overloading.
16. Cable and Satellite Protection: Provides surge protection for a Cable and satellite connection. The input connects the coaxial cable from your antenna or your satellite dish. The output connects the coaxial cable to your TV or cable box input or your satellite receiver input.
17. Ground Screw: Provides a ground reference point for any ungrounded components.
18. Ultra-High Current PowerLine™ 100 AC Power Cable: High-density double shielded AC power cord specially designed to maximize power transfer.

RF Remote Control

19. Monster GreenPower™ RF Remote Control.
20. RF Remote Control Base (wall-mountable).

HOOK-UP GUIDE


High-Definition Digital Outlet Hook-Up

These outlets have a special filter circuit that is optimized to reduce interference to your high-definition digital components.

- A)** Attach a Monster Power identification label to each component's power cord before you plug it into the appropriate color-coded PowerCenter outlet.
- B)** Plug each component's power cord (HDTV, DVD, etc.) into the PowerCenter's corresponding outlet. For components not listed, determine if they are audio, video, high-definition digital or ultra-high current audio components, and use a corresponding outlet for best performance.

IMPORTANT NOTE

It does not harm analog audio, video, or high current audio components to be connected to the high-definition digital outlets. However, for best performance, we recommend plugging in only digital components to the high-definition digital outlets.

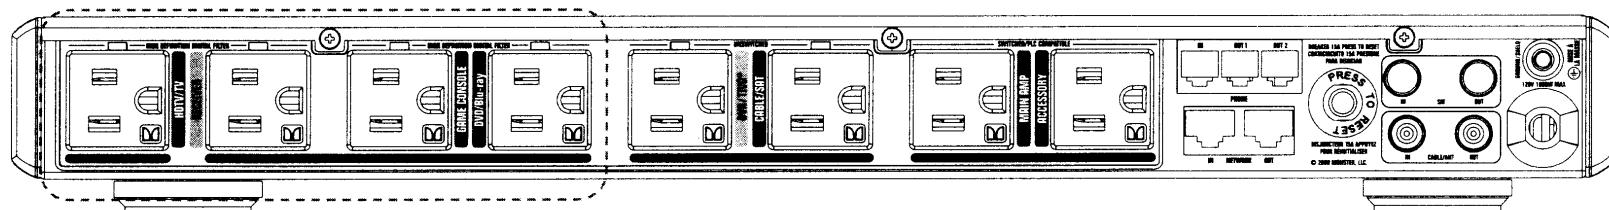

High Definition Digital Outlets

HOOK-UP GUIDE


Digital Outlet Hook-Up

These outlets have a special filter circuit that is optimized to reduce interference to your digital components.

- A)** Attach a Monster Power identification label to each component's power cord before you plug it into the appropriate color-coded PowerCenter outlet.
- B)** Plug each component's power cord (DVR/TiVo, cable/satellite box) into the PowerCenter's corresponding outlet. For components not listed, determine if they are audio, video, digital, or ultra-high current audio, and use a corresponding outlet for best performance.

IMPORTANT NOTE

It does not harm video, digital, or high current audio components to be connected to the analog audio outlets. However, for best performance, we recommend plugging in only analog audio components to the analog audio outlets.

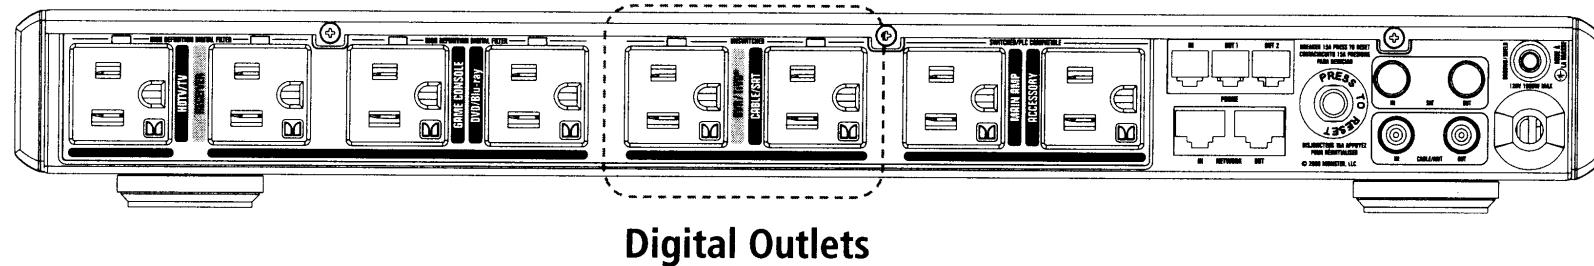

HOOK-UP GUIDE

Ultra-High Current Audio PLC-Compatible Outlet Hook-Up


These outlets are designed to deliver maximum current to power hungry components like amplifiers and pre-amplifiers.

- A) Attach a Monster Power® identification label to each component's power cord before you plug it into the appropriate color-coded PowerCenter outlet.
- B) Plug each component's power cord (Amplifier, etc.) into the PowerCenter's corresponding outlet. For components not listed, determine if they are audio, video, digital, or ultra-high current audio, and use a corresponding outlet for best performance.

IMPORTANT NOTES

It does not harm analog audio, video, or digital components to be connected to the ultra-high current audio outlets. However, for best performance, we recommend plugging in only high-current audio components to the ultra-high current audio outlets.

PLC or Power Line Communications is a home networking solution that uses your home's AC power wiring for data transfer. These outlets will allow PLC signals to pass through while still actively filtering noise and interference.

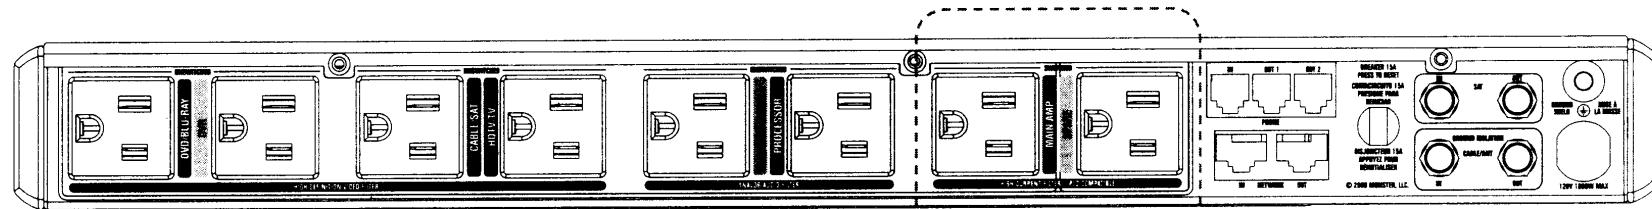

**High Current
PLC-Compatible Outlets**

HOOK-UP GUIDE

Monster GreenPower™ Outlet Management Hook-Up


GreenPower Controlled (switched) outlets are designed to automatically shut down when the component plugged into the GreenPower Control Outlet is turned off.

- A)** Plug your HDTV/TV into the GreenPower Control outlet.
- B)** Plug other components into their corresponding GreenPower Controlled outlets.

When the the HDTV/TV plugged into the GreenPower Control Outlet is turned off or goes into sleep mode, the GreenPower Controlled Outlets automatically shut down, eliminating wasted stand-by mode power consumption.

Monster GreenPower RF Control Outlets

These outlets are controlled by the included RF Remote Control. When you turn off these outlets with the Remote Control, the components plugged into these outlets will not draw any power, eliminating wasted stand-by mode power consumption.

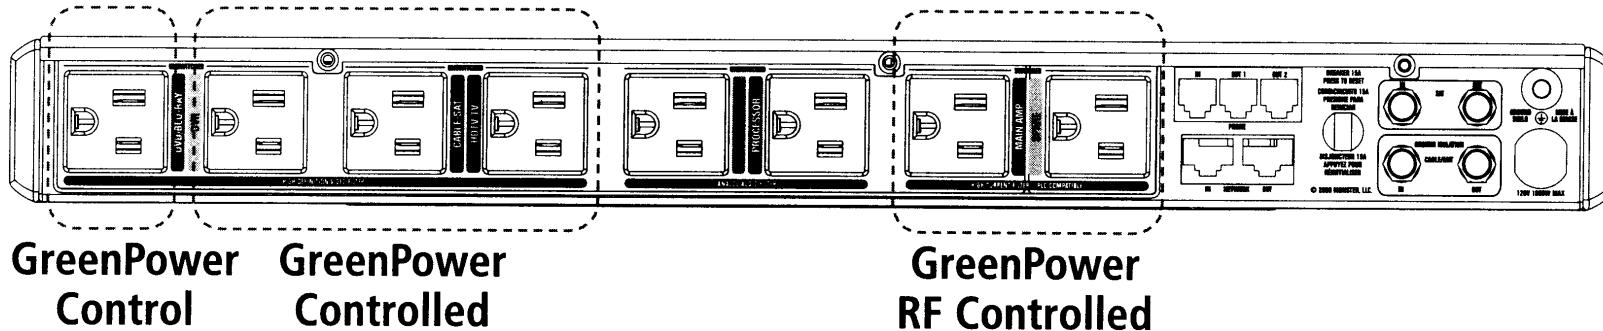

HOOK-UP GUIDE

GreenPower Outlet Management Operation

Please Read These Instructions Before Connecting Any Equipment to the GreenPower Controlled (Switched) Outlets

1. You must connect an electronic device that draws sufficient power in operational mode to activate GreenPower switched outlets. If you do not, the GreenPower switched outlets will not deliver power to connected equipment.
2. If you hook up a hard drive-based device such as a DVR, cable/satellite box, or video game console to a GreenPower switched outlet, make sure that the device is not being read from or written to when you turn off the component connected to the GreenPower Control outlet.

Important data and settings stored on hard drives (recorded TV shows, game saves, etc.) may be corrupted or deleted if power is turned off while the hard drive is being read from or written to. To ensure against the possibility of data loss or corruption, you should connect hard drive-based devices to unswitched outlets [or disable GreenPower using the switch located at the end of the PowerCenter].

Monster assumes no responsibility for data loss, corruption or damage to hard drive-based devices connected to PowerCenters with GreenPower automatic outlet switching.

3. Some components can take up to 10 minutes to switch to stand-by or sleep mode. If the Monster GreenPower® switched outlets on your PowerCenter do not turn off immediately, please wait approximately 10 minutes to allow the component plugged into GreenPower Control outlet to switch to stand-by mode. Once this component is in stand-by mode, the GreenPower switched outlets will turn off, eliminating stand-by energy waste by that component.

HOOK-UP GUIDE

GreenPower Level Adjustment

NOTE: A GreenPower Level Adjustment Screw is located on the bottom of the PowerCenter. Because various components consume different levels of power in stand-by mode, the adjustment screw lets you set the appropriate level to control GreenPower Controlled (switched) outlets for your component.

To determine the correct setting of the GreenPower Level Adjustment screw:

Connect your TV to the "GREENPOWER CONTROL" outlet. Connect your other devices to "GREENPOWER CONTROLLED" outlets.

Turn on your TV

Turn on all components connected to "GREENPOWER CONTROLLED" outlets

If the components connected to "GREENPOWER CONTROLLED" outlets do not come On, turn the screw counter-clockwise until components turn On.

If the components connected to "GREENPOWER CONTROLLED" outlets turn On and Off intermittently, turn the screw counter-clockwise approximately 15 degrees. Test by turning TV On and Off to verify that the GreenPower adjustment level is set properly.

If the components connected to "GREENPOWER CONTROLLED" outlets do NOT turn Off when you turn Off the TV, turn the screw clockwise until these components turn Off. Test by turning TV On and Off to verify that the GreenPower adjustment level is set properly.

HOOK-UP GUIDE

RF Remote Control Syncing for Multiple PowerCenters

The GreenPower™ RF Remote Control can be used with more than one RF Controlled Monster® PowerCenter.™ To use the RF remote control for more than one unit, it is necessary to sync its signal to the PowerCenter

- 1.** Plug in the PowerCenter's power cord to a grounded AC outlet. Do not connect any equipment to the PowerCenter's outlets before syncing the RF remote control.
- 2.** Press the sync button on the bottom of the PowerCenter with the point of a pen or other object and hold down until you hear a single "beep." The unit is now in learning mode.
- 3.** With the remote control at least 6" (15.2cm) from the PowerCenter, press and hold both On and Off buttons on the RF remote control. The PowerCenter will "beep" twice to indicate that it has learned the RF code.


NOTE: After pressing the sync button (Step 2), the PowerCenter remains in learning mode for 10 seconds. If you do not sync the remote control within 10 seconds, you must press the sync button again to activate learning mode.

HOOK-UP GUIDE

Coaxial Connections Hook-Up

Coaxial Connections provide surge protection against damaging voltage surges and spikes on the incoming coax cable. The HDP1850G Cable/TV coaxial connection also features ground loop isolation to dramatically reduce unwanted noise. Only a Cable TV line should be connected to the PowerCenter's Cable TV coaxial connection. Connecting a Satellite or other cable to the PowerCenter's Cable TV connection may result in compromised reception.

Protect TV/Cable and Satellite Connections as follows:

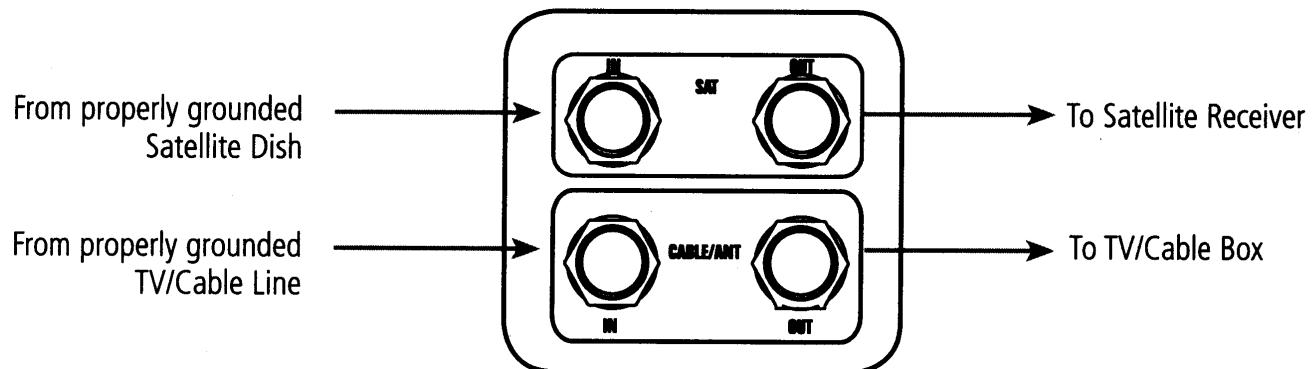

NOTES: You may need additional coaxial cables to connect the HDP1850G to your components.


To ensure complete power surge protection, all lines that connect to your AV components need to be connected to surge protected connections on the PowerCenter.

HOOK-UP GUIDE

Phone and Network Connections Hook-Up

Phone connections provide surge protection against damaging voltage surges and spikes coming from the phone line. This PowerCenter also incorporates a phone splitter for convenience.

Protect Phone and Network Connections as follows:

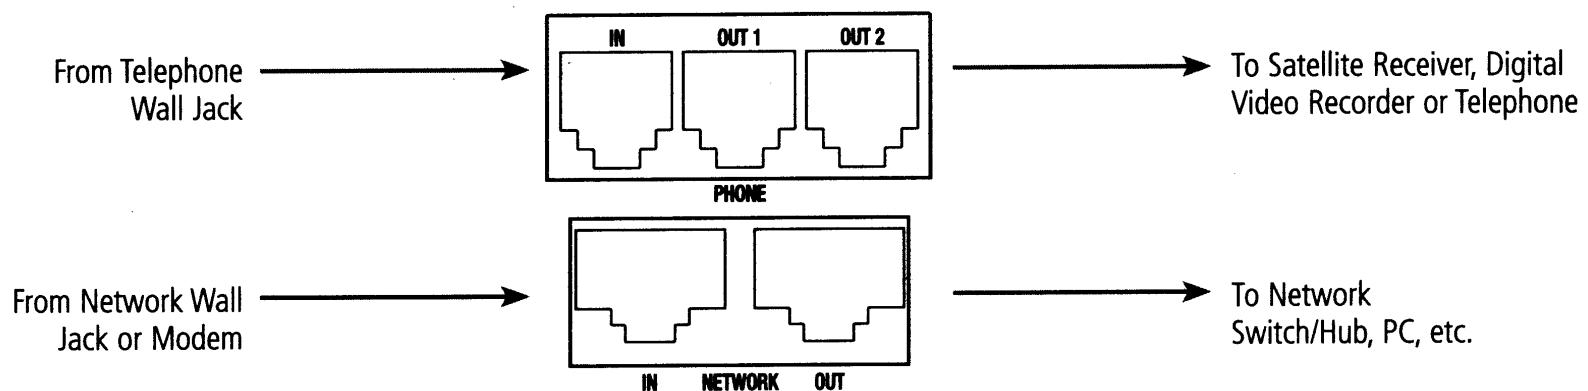

NOTES: The HDP 1850G is not intended for hook-up of any phone which carries two separate phone lines on a 4-pin RJ11 jack.

To ensure complete power surge protection, all lines that connect to your AV components need to be connected to surge protected connections on the PowerCenter.

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
The PowerCenter is not receiving power.	The PowerCenter is not turned On.	<ul style="list-style-type: none">• Turn the PowerCenter switch on.• Make sure the PowerCenter's AC power plug is plugged into a properly grounded 120 volts (nominal) wall outlet.• In some households, a wall switch may need to be turned on to make the wall outlet active. Try turning on the light switches located near the wall outlet.
	Too many devices are connected, causing an overload, tripping the Thermal Circuit Breaker.	<ul style="list-style-type: none">• Press the PowerCenter Thermal Circuit Breaker button in to reset. Please allow 10 minutes before attempting to reset. If you reset too soon, the breaker will prematurely sense power overload and not allow the PowerCenter to operate.• If the Circuit Breaker continues to trip, try moving one or more components to another PowerCenter. You may be drawing too much current through one PowerCenter.
RF Remote Control does not turn outlets On/Off.	<ul style="list-style-type: none">• Battery is dead.• Unit not plugged in.• Remote control is too far away from unit.	<ul style="list-style-type: none">• Replace battery.• Plug in unit.• Operate 30ft of unit.

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
Component is not receiving power.	The component is plugged into a switched outlet and the PowerCenter has not been turned On.	<ul style="list-style-type: none">• Turn the PowerCenter On.• Or, plug the component into an Unswitched outlet.
	The PowerCenter is plugged into a Switched outlet, but power on the component is not On. In some instances, a component plugged into a switched outlet won't receive power when the PowerCenter is turned On unless the component power is also switched On.	<ul style="list-style-type: none">• Turn the component power On.
Speakers emit a humming or buzzing noise.	The PowerCenter is sharing AC power with equipment that is not properly grounded.	<ul style="list-style-type: none">• Connect your PowerCenter to a dedicated outlet.• Try unplugging different components from the PowerCenter one at a time to see if the noise stops. If a component is discovered to be improperly grounded, attach a copper wire from the component's chassis to the PowerCenter's grounding post.

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
Video picture has rolling bars or ghosting.	The incoming video signal is not properly grounded.	<ul style="list-style-type: none">• Contact your cable or satellite provider to correct your installation.
The PowerCenter is emitting a loud buzzing alarm.	The PowerCenter protection circuitry has sacrificed itself to protect connected equipment from a catastrophic surge.	<ul style="list-style-type: none">• The PowerCenter must be replaced. See the Warranty Information section for important details.
GreenPower Controlled Outlets do not switch on when device plugged into GreenPower Control Outlet is turned on.	Device plugged into GreenPower Control Outlet does not draw sufficient operating power to activate GreenPower Controlled Outlets.	<ul style="list-style-type: none">• Adjust GreenPower Adjustment Screw to reset activation level – see page 16 for details.
GreenPower Controlled Outlets do not switch off when device plugged into GreenPower Control Outlet is turned off.	Device plugged into GreenPower Control Outlet draws enough power in stand-by mode to keep GreenPower Controlled Outlets on.	<ul style="list-style-type: none">• Adjust GreenPower Adjustment Screw to reset activation level – see page 16 for details.

SPECIFICATIONS

HDP 1850G POWERCENTER

Continuous Duty Electrical Rating	120V/60Hz	
Maximum Current Rating	15A/1850GW	
Protection Modes	Line-Neutral (L-N) Line-Ground (L-G) Neutral-Ground (N-G)	
Total Energy Dissipation	5,526 Joules	
Clamping Level (TVSS Voltage)	400 Volts (PLC Outlet-Supression Voltage is 400-500V max. Steady state clamping voltage is 700V)	
Dimensions	Width:	17.09"
	Height With Feet:	2.25"
	Height Without Feet:	1.73"
	Depth:	9.49"
		434mm
		57.15mm
		44mm
		241mm

LIMITED WARRANTY FOR CONSUMERS

Monster, LLC, 7251 Lake Mead Blvd West, Las Vegas, NV 89128, USA ("Monster") extends to You this Limited Warranty. Statutory or common law may provide You with additional rights or remedies, which shall not be affected by this Limited Warranty.

DEFINITIONS

"Adequate Use" means use of the Product and Connected Equipment (i) within a home or dwelling, (ii) for private (as opposed to commercial) purposes, (iii) in conformance with all applicable local, state or federal law, code or regulations (including without limitation building and/or electrical codes), (iv) in accordance with manufacturer recommendations and/or instructions in the materials and documentation that accompany the Product and any Connected Equipment, (v) with proper electrical grounding, (vi) with proper and direct connection between the Product and an AC power source that has protective grounding (excluding gas or diesel powered generators), (vii) with cable or telephone lines to any Connected Equipment properly connected to the Product, and (viii) without a connection in a "daisy-chain" fashion to or with any extension cord, surge suppressor, power strip, uninterruptible power supply ("UPS") or other equipment.

"Authorized Dealer" means any distributor, reseller or retailer that (i) was duly authorized to do business in the jurisdiction where it sold the Product to You, (ii) was permitted to sell You the Product under the laws of the jurisdiction where You bought the Product, and (iii) sold You the Product new and in its original packaging.

"Connected Equipment" means any device that is (i) generally suited to be used with the Product or products of the same kind, (ii) meets the requirements of all applicable laws and safety standards, (iii) contains only parts manufactured, sold or recommended by the original manufacturer of the Connected Equipment, and (iv) has not been altered, tampered with or modified by any person other than its manufacturer or service personnel authorized or recommended by the manufacturer of the Connected Equipment.

"Connected Equipment Damage" means physical damage to Connected Equipment caused by a Product Defect by a transient AC power, cable, telephone, or lightning surge while connected to a properly installed Product. Connected Equipment Damage (i) may not be caused by a defect or unrelated damaging of the Connected Equipment or a surge/spike

or lightning strike through a source, medium or connection other than through the Product, and (ii) does not extend to loss of data, or consequential, indirect or special damages resulting from the Connected Equipment Damage.

"Fair Market Value" ("FMV") means the fair market value of the Connected Equipment at the time Connected Equipment Damage occurs.

"Formal Warranty Claim" means a claim made in accordance with the section "Formal Warranty Claims" herein.

"Maximum Coverage Amount" means the maximum amount that Monster will pay to You under this Limited Warranty for Connected Equipment Damages and is defined in relation to each Product in the Specifications Table below.

"Product" means a Product (i) that is listed in the Specifications Table below, (ii) that You bought from an Authorized Dealer new and in its original packaging, and (iii) whose serial number, if any, has not been removed, altered, or defaced.

"Product Defect" means a defect, malfunction, non-conformance to this Limited Warranty or other inadequacy of the Product that existed at the time when You received the Product from an Authorized Dealer and that causes a failure of the Product to perform in accordance with Monster's documentation accompanying the Product, unless such failure has been caused completely or partly by (a) any use other than Adequate Use, (b) transportation, neglect, misuse or abuse by anyone other than Monster's employees; (c) alteration, tampering or modification of the product by anyone other than a Monster employee; (d) accident (other than a malfunction that would otherwise qualify as a Product Defect); (e) maintenance or service of the Product by anyone other than a Monster employee; (f) exposure of the Product to heat, bright light, sun, liquids, sand or other contaminants; or (g) acts outside the control of Monster, including without limitation acts of God, fire, storms (excluding lightning surges), earthquake or flood.

"Warranty Period" means the time period during which Monster must have received Your Formal Warranty Claim. The different Warranty Periods related to Product Defects and Connected Equipment Damage are defined in the Specifications Table below. The Warranty Period commences on the date when You purchased or received (whichever occurs later) the Product from an Authorized Dealer as evidenced by the Authorized Dealer's invoice, sales receipt or packing slip. If You do not have written proof of the date of purchase or receipt, then the Warranty Period commences three (3) months after the date when the Product left Monster's factory as evidenced by Monster's records. The Warranty Period ends after the time

defined in the Specifications Table has expired, or after You have transferred ownership of the Product, whichever occurs earlier. Also, You must call Monster and obtain a Return Authorization Number (as described under "How to Make a Claim") within two (2) months after You discover a Product Defect (or should have discovered it, if such Product Defect was obvious).

"You" means the first individual person that purchased the Product in its original packaging from an Authorized Dealer. This Limited Warranty does not apply to persons or entities that bought the Product (i) in used or unpackaged form, (ii) for resale, lease or other commercial use, or (iii) from someone other than an Authorized Dealer.

SCOPE OF THIS LIMITED WARRANTY

PRODUCTS. If a Product contained a Product Defect when You bought it from an Authorized Dealer and Monster receives a Formal Warranty Claim from You within two (2) months after You discover such Product Defect (or should have discovered it, if such Product Defect was obvious) and before the end of the Warranty Period for Product Defects applicable to the affected Product, then Monster will provide You with one of the following remedies: Monster will (1) repair or, at Monster's sole discretion, replace the Product, or (2) refund to You the purchase price You paid to the Authorized Dealer for the affected Product if repair or replacement is not commercially practicable or cannot be timely made.

CONNECTED EQUIPMENT DAMAGE. Monster will also provide You with a remedy regarding Connected Equipment Damage if (i) You have a claim under the Limited Warranty for Products because of a Product Defect that causes Connected Equipment Damage despite Adequate Use, and (ii) Monster receives a Formal Warranty Claim from You before the end of the Warranty Period for Connected Equipment Damage applicable to the affected Product. If the conditions listed in the preceding sentence are met, Monster will provide You with one of the following remedies provided that Monster may decide at its sole discretion which of the three remedies it provides: Monster will (1) replace the damaged Connected Equipment; (2) pay to repair the damaged Connected Equipment; or (3) pay You the FMV of the Connected Equipment, provided that such payments shall not exceed (i) the Maximum Coverage Amount for the Product, or (ii) the actual damage having arisen from power surges due to a Product Defect. NOTE: COMPENSATION FOR RESTORATION OF DATA LOSS IS NOT COVERED AND MONSTER DOES NOT ASSUME ANY LIABILITY FOR ANY INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES UNDER THIS LIMITED WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

GENERAL PROVISIONS

CHOICE OF LAW/JURISDICTION. The laws of the State of California, USA, govern this warranty. It gives You specific legal rights, and You may also have other rights that vary from state to state and country to country. This warranty does not affect any additional rights You have under laws in your jurisdiction governing the sale of consumer goods, including, without limitation, national laws implementing EC Directive 44/99/EC.

OTHER RIGHTS. THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE AND COUNTRY TO COUNTRY. THIS WARRANTY EXTENDS ONLY TO YOU AND CANNOT BE TRANSFERRED OR ASSIGNED. If any provision of this Limited Warranty is unlawful, void or unenforceable, that provision shall be deemed severable and shall not affect any remaining provisions. In case of any inconsistency between the English and other versions of this Limited Warranty, the English version shall prevail.

REGISTRATION. Please register Your Product at www.monsterpower.com. Failure to register will not diminish Your warranty rights.

SPECIFICATIONS TABLE

Product Model No.	Maximum Coverage Amount	Warranty Period for Product	Warranty Period for Connected Equipment Damage
HDP 1850G	USD\$400,000.00	5 years	5 years

* "Lifetime" means the lifetime of the original individual purchaser of the Product, or for as long as the original individual purchaser owns the Product, whichever is less in time

FORMAL WARRANTY CLAIM

HOW TO MAKE A CLAIM. In the event damage has occurred to Products or Connected Equipment, You must follow these instructions: (1) Call Monster within two (2) months after You discover a Product Defect (or should have discovered it, if such

Product Defect was obvious); (2) Give a detailed explanation of how the damage occurred; (3) Obtain a Return Authorization Number; (4) Upon receipt of a claim form (which may be sent to You after You filed Your Formal Warranty Claim), fill out the claim form entirely; (5) Return the Products, shipping prepaid by You (to be refunded if You are entitled to a remedy under the Scope of this Limited Warranty), to Monster for verification of damage, along with a copy of Your original sales receipts and proof of purchase (UPC label or packing slip) for such Products, the completed claim form, and printed Return Authorization Number on the outside of the return package (the claim form will include instructions for return).

TELEPHONE NUMBERS. If you bought the product in the United States, Latin America, or Asia Pacific, contact Monster, LLC (455 Valley Drive, Brisbane, CA 94005) at 1 877 800-8989. If you bought the product anywhere else, contact Monster Technology International Ltd., Ballymaley Business Park, Ennis, Co. Clare, Ireland. You can write or use one of the following telephone numbers: Canada 866-348-4171, Ireland 353 65 68 69 354, Belgium 0800-79201, Czech Republic 800-142471, Denmark 8088-2128, Finland 800-112768, France 0800-918201, Germany 0800-1819388, Greece 00800-353-12008, Italy 800971470, Netherlands 0800-0228919, Norway 800-10906, Russia 810-800-20051353, Spain 900-982-909, Sweden 020-792650, United Kingdom 0800-0569520

FURTHER PROCEEDINGS. Monster will determine whether a Product Defect existed and the damage to the Connected Equipment was caused by the Product. You must allow Monster access to the premises and site where the damage occurred and all equipment and property related thereto for Monster inspection by its employees or authorized representatives. Monster may, at its discretion, direct You to obtain a repair estimate at a service center or, to send the Connected Equipment to Monster for repair. If a repair estimate is required, You will be instructed on how to properly submit the estimate and the resulting invoice to Monster for payment. Any fees for repairs may be negotiated by Monster.

TIMING. If You bring a Formal Warranty Claim and fully comply with all terms and conditions of this Limited Warranty, Monster will use its best efforts to provide You with a remedy within thirty (30) days after receipt of Your Formal Warranty Claim (if You reside in the United States - forty-five (45) days if You reside elsewhere), unless obstacles outside Monster's control delay the process.



We invite you to visit the Monsters at: MonsterPower.com

Designed in the USA and manufactured
for Monster to its quality specifications.

Made in China.

The Monster Power HDP 1850G is protected under
the following patents: U.S.: 5,589,718; 7,262,945 B2; 6,473,510 B1;
6,614,636 B1; 6,683,770 B1; 6,829,129 B2; 7,262,945 B2; D559,239 S.
Taiwan: NI-130119; NI-171813; NI-165023; NI-223486.
China ZL99107639.7.

Other Patents Pending.

"Monster", "Monster Cable", "Monster Power", "Monster Clean Power",
"T2", "Tri-Mode", and "PowerCenter" are registered and unregistered
trademarks of Monster Cable Products, Inc. or its
subsidiaries in the U.S. and other countries.

Nous vous invitons à visiter les Monstres à : MonsterPower.com

Conçu aux Etats-Unis et fabriqué pour Monster selon
ses spécifications de qualité.

Fabriqué en Chine.

Le Monster Power HDP 1850G est protégé sous les brevets
suivants : U.S.: 5,589,718; 7,262,945 B2; 6,473,510 B1; 6,614,636
B1; 6,683,770 B1; 6,829,129 B2; 7,262,945 B2; D559,239 S.
Taiwan: NI-130119; NI-171813; NI-165023; NI-223486.
Chine ZL99107639.7.

D'autres brevets en attente.

« Monster », « Monster Cable », « Monster Power », « Monster
Clean Power », « T2 », « Tri-Mode » et sont des marques de
commerce enregistrées et non enregistrées de Monster Cable
Products, Inc. ou ses subsidiaires aux
É.U. et autres pays.

© 2009 Monster, LLC
7251 West Lake Mead Blvd.
Las Vegas, NV 89128, USA
1-877-800-8989

Monster Technology International Ltd.
Ballymaley Business Park
Gort Road, Ennis, Co. Clare, Ireland
001-866-348-4171

Monster Power® PowerCenter™ ID Labels

Etiquettes Monster Power® PowerCenter™

Etiquetas de identificación para el Monster Power® PowerCenter™

Place one label at the end of the corresponding power cord.

Posez une étiquette à l'extrémité du cordon d'alimentation correspondant.

Pegue una etiqueta en el extremo del cable de alimentación correspondiente.



HDTV/TV	HDTV/TV	RECEIVER	RECEIVER
HDTV/TV	HDTV/TV	RECEIVER	RECEIVER
DVD/Blu-ray™	DVD/Blu-ray™	SUBWOOFER	SUBWOOFER
DVD/Blu-ray™	DVD/Blu-ray™	SUBWOOFER	SUBWOOFER
MAIN AMP	MAIN AMP	MEDIA SERVER	MEDIA SERVER
MAIN AMP	MAIN AMP	MEDIA SERVER	MEDIA SERVER
ACCESSORY 1	ACCESSORY 1	ACCESSORY 2	ACCESSORY 2
ACCESSORY 1	ACCESSORY 1	ACCESSORY 2	ACCESSORY 2
CABLE/SAT	CABLE/SAT	DVR/TiVO®	DVR/TiVO®
CABLE/SAT	CABLE/SAT	DVR/TiVO®	DVR/TiVO®

English



Information to consumers in application of EU WEEE Directive 96/2002
 This product is subject to European Union regulations that promote the re-use and recycling of used electrical and electronic equipment. This product required the extraction and use of natural resources and may contain hazardous substances. The symbol above, on the product or on its packaging, indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service, or the store from which you purchased the product. For more information about Monster products, please visit us at: www.MonsterCable.com.

Français



Informations destinées aux consommateurs conformément à la Directive Européenne 96/2002 concernant les Déchets d'Équipements Électriques et Électroniques (DEEE)

Ce produit est soumis aux règles en vigueur dans l'Union Européenne promouvant la réutilisation et le recyclage des déchets d'équipements électriques et électroniques. Ce produit a requis l'extraction et l'utilisation de ressources naturelles et peut contenir des substances dangereuses. Le symbole ci-dessus, apposé sur le produit ou sur son emballage, indique que ce produit ne peut être jeté avec votre déchet ménager. Au contraire, il est de votre responsabilité de traiter vos déchets d'équipements en les remettant à un centre de collecte des déchets chargé du recyclage des déchets d'équipements électriques et électroniques. La reprise et le recyclage séparés de vos déchets d'équipements au moment de la mise au rebut aideront à conserver les ressources naturelles et à assurer qu'ils soient recyclés d'une manière protégeant la santé publique et l'environnement. Pour obtenir de plus amples informations au sujet de l'endroit de reprise et de collecte de vos déchets d'équipements pour le recyclage, veuillez vous adresser au bureau compétent de votre commune, à la société de collecte des déchets ou directement auprès du magasin où vous avez acheté le produit en question. Pour obtenir de plus amples informations sur les produits Monster, veuillez visiter notre site à l'adresse suivante: www.MonsterCable.com.

Nederlands



Informatie voor de consumenten in uitvoering van de Europese Richtlijn 2002/96/EG inzake afgedankte elektrische en elektronisch apparatuur (AEEA).

Dit product valt onder het toepassingsgebied van de Europese richtlijnen die het hergebruik en de recycling van gebruikte elektrische en elektronische apparaten promoten. Het product vereist de ontginning en gebruik van natuurlijke bronnen en kan gevaarlijke stoffen bevatten. Het hierboven of afgebeeldde symbool op het product of op de verpakking, geeft aan dat het niet mag worden weggegooid met het gewone huisvuil. In plaats daarvan is het uw verantwoordelijkheid uw afgedankte apparaat af te leveren op een verzamelpunt voor recycling van elektrische en elektronische apparaten. De gescheiden inzameling en recycling van afgedankte apparaten draagt bij tot het behoud van natuurlijke bronnen en tot het hergebruik van materiaal op een manier die de volksgezondheid en het leefmilieu bescherm. Voor meer informatie over waar u uw afgedankte apparatuur kunt inleveren voor recycling, kunt u contact opnemen met de gemeente, het uw huishoudelijke afvalophaaldest of de winkel waar u het product heeft aangeschaft. Voor meer informatie met betrekking tot producten van Monster, kunt u terecht op de website www.MonsterCable.com.

Español



Información al consumidor en aplicación de la Directiva Comunitaria RAEE 96/2002 (sobre Residuos de Aparatos Eléctricos y Electrónicos)

Este producto está sujeto al reglamento de la Unión Europea que promueve la reutilización y reciclaje de aparatos eléctricos y electrónicos usados. Este producto puede contener sustancias peligrosas, y la extracción y utilización de recursos naturales fue necesaria para su fabricación. El símbolo que aparece al inicio, si figura en el producto o en su envase, indica que este producto no debe eliminarse junto con el resto de sus residuos doméstico. Así que es responsabilidad de los consumidores deshacerse de sus aparatos depositándolos en un punto de recogida designado para el reciclaje de aparatos eléctricos o electrónicos. La recogida selectiva y reciclaje de los residuos de sus aparatos en el momento de su eliminación contribuye a la conservación de los recursos naturales y garantiza su reciclaje de forma que se proteja la salud de las personas y el medio ambiente. Para obtener más información sobre los puntos de recogida de residuos eléctricos y electrónicos para su reciclaje, póngase en contacto con su ayuntamiento, con el servicio de eliminación de residuos domésticos, o con el establecimiento en el que adquirió el producto. Para obtener más información sobre los productos Monster, visite nuestra página web: www.MonsterCable.com.

Italiano



Informazioni ai consumatori in applicazione della Direttiva UE WEEE 96/2002

Questo prodotto è soggetto alla regolamentazione europea che promuove il recupero ed il riciclo di apparecchi elettrici ed elettronici usati. Questo prodotto richiede l'estrazione e l'impiego di risorse naturali e può contenere sostanze pericolose. Il simbolo sopra, posto sul prodotto stesso o sull'imballaggio, indica che il prodotto non può essere gettato assieme agli altri rifiuti comuni. Al contrario, è responsabilità del consumatore eliminare

il prodotto consegnandolo ad un punto di raccolta designato per il riciclo di apparecchi elettrici ed elettronici. La raccolta separata ed il riciclo di questo rifiuto elettrico, al momento della raccolta, aiuterà a conservare le risorse naturali e ad assicurare un corretto riciclo, al fine di preservare la salute umana e l'ambiente. Per maggiori informazioni circa dove consegnare i rifiuti elettrici ai fini del riciclo, si prega di contattare l'ufficio della propria città, il servizio di gestione di rifiuti, o il negozio dove si è acquistato il prodotto. Per maggiori informazioni sui prodotti Monster, si prega di visitare il sito: www.MonsterCable.com.

Polski



Informacja dla konsumentów w zwi zku z obow zwanem Dyrektywy 2002/96/WE

Niniejszy produkt podlega regulacjom prawnym Unii Europejskiej promuj cym ponowne uycie i recykling zu yego sprz t elektrycznego i elekonicznego. Wytworzenie produktu wymaga skorzystania z surowcow naturalnych naszej planety; ponadto, produkt mo e zawiera substancje niebezpieczne. Symbol umieszczony powy ej, na produkcje, oraz na jego opakowaniu, wskazuje, e zu yty produkt nie mo e zosta wyrzucony wraz z innymi odpadami i mieciami powstaj cym w gospodarstwie domowym, przeciwnie: jako nabyci i ytkownicy, s Pa swoim odpowiedzialnym za przekazanie zu ytemu produktu do wyspecjalizowanego punktu zbierania zu ytemu sprz t elektrycznego i elekonicznego. Selekcyjowanie sprz t ju w momencie zak czenia jegu u ywania oraz po nieszy recykling sprz t przyczyni si do zachowania surowcow naturalnych i zapewni, e zu yty sprz t elektryczny i elekoniczny podlega b dzie recyklingowi prowadzonemu w spos b bezpieczny dla zdrowia ludzi oraz przyjazny dla rodowiska. W celu uzyskania informacji o adresach punkt w, do których mo na przekaza zu yty sprz t elektryczny i elekoniczny, prosim o skontaktowanie si ze swoim urz dem gminy lub miasta, przedsi biorem zajmuj cym si wywozem miec, albo ze sklepem, w którym sprzedany zosta niniejszy produkt. Wi cji informacji o produktach Monster mog Pa stwo uzyska na stronie: www.MonsterCable.com.

Magyar



Felhaszn lói tajkoztat az Elektronikus és Elektronikai Hulladékokról szóló 96/2002/EK Irányelv alkalmaz sáról

Ez a termék az Európai Unió használt elektronikus és elektronikai készülékek újrahasználatainak és újrahasznosításának el mozdítását célzó rendelkezéseinak hatálya alá esik. Ez a termék természet er források kitermelését és felhasználását igényelte és veszélyes anyagokat tartalmazhat. A fenti jel, mely a termékben vagy annak csomagolásár szerepel, azt jelöli, hogy a terméket tilos egyéb háztartási hulladékkal együtt kidobni. Ezzel szemben az Ön felel ssége, hogy gondoskodjon a használt készülékeknek megfelel kezelés l, azáltal, hogy ártadja azt egy kijelölt gy jtelen az elektronikus és elektronikai készülék újrahasznosítása érdekében. A használt készülékek külön gy jtés és újrahasznosítása a természet er források meg rész szolgálya, és egyben biztosítja, hogy olyan módon kerüljenek a készülékek újrahasznosításra, amely védi az emberi egészséget és a környezetet. Arra vonatkoz további információt, hogy hol adhatja le használt termékét annak érdekelben, hogy az újrahasznosításra kerüljön, kérjük, keresse fel a helyi önkormányzatot, a háztartási hulladék eltávolítását vég szolgáltatót vagy az üzletet, amelyben a termékét vásárolta. Amennyiben további információra van szüksége a Monster termékekr l, keresse fel honlapunkat: www.MonsterCable.com.

Cesky



Informace pro spot ebitele p i uplat ování Smrnice Evropského parlamentu a Rady 2002/96/ES o odpadních elektrických a elektronických za íenich

Tento výrobek podléhá edpis m Evropské Unie, které se vztahu jí na opovnou použitie a recyklaci použitých elektrických a elektronických za íen. K výrobku bylo nutné využi p řírodních zdroj. Tento výrobek m že obsahovat nebezpe né látky. Výše uvedený symbol umíst ný na výrobku nebo na jeho obalu znamená, že daný výrobek nesmí být odstran s ostatním odpadem pocházejícím z Vaši domácnosti. Je Vaši povinností toto elektroza ien odevzdat na ur ené sb rné místo k recyklaci elektroodpadu. Odd leny sb r a recyklace elektroodpadu p i jeho odstran ní napom že zachování p řírodních zdroj a zaji st, aby recyklace prob hla zp sobem, který chráni lidské zdraví a životní prost ed. Podrobné údaje o tom, kde elektroodpad p řírodních zdrojov, tento výrobek m Že obsahova nebezpe né látky. Hore uvedený symbol umíst ený na výrobku alebo na jeho obale znamená, že daný výrobek nesmí být zneškodnený spolu s ostatním odpadem pocházejícím z Vašej domácnosti. Je Vašou povinnos ou toto elektrozariadenie odovzda na ur ené zberné místo k recyklácii elektroodpadu. Oddeľený zber a recyklácia elektroodpadu pri jeho zneškodnení napom že zachovanie p řírodných zdrojov a zabezpe i, aby recyklácia prebehla spôsobom, ktorý chráni u dské zdravie a životné prostredie. Podrobné údaje o tom, kde elektroodpad m Že odovzda k recyklácii, ziskate na príslušnom úrade miestnej samosprávy, u spolu nosťi zabeze ujícej spracovanie odpadu z domácností alebo v obchode, kde ste daný výrobok zakúpili. Viac informací o výrobkoch Monster získate na internetových stránkach: www.MonsterCable.com.

Slovensky



Informácie pre spot ebitele p i uplat ování Smrnice Európskeho parlamentu a Rady 2002/96/ES o odpade z elektrických a elektronických zariadení

Tento výrobok podlieha predpisom Európskej únie, ktoré sa v zahŕňa na opätné použitie a recykláciu použitých elektrických a elektronických zariadení. K výrobku tohto výrobku bolo nutné využi p řírodných zdrojov. Tento výrobok m Že obsahova nebezpe né látky. Hore uvedený symbol umiest ený na výrobku alebo na jeho obale znamená, že daný výrobok nesmí byt zneškodnený spolu s ostatným odpadom pochádzajúcim z Vašej domácnosti. Je Vašou povinnosou toto elektrozariadenie odovzda na ur ené zberné místo k recyklácii elektroodpadu. Oddeľený zber a recyklácia elektroodpadu pri jeho zneškodnení napom že zachovanie p řírodných zdrojov a zabezpe i, aby recyklácia prebehla spôsobom, ktorý chráni u dské zdravie a životné prostredie. Podrobné údaje o tom, kde elektroodpad m Že odovzda k recyklácii, ziskate na príslušnom úrade miestnej samosprávy, u spolu nosťi zabeze ujícej spracovanie odpadu z domácností alebo v obchode, kde ste daný výrobok zakúpili. Viac informací o výrobkoch Monster získate na internetových stránkach: www.MonsterCable.com.

Deutsch



Verbraucherinformation in Anwendung der EU-Richtlinie über Elektro- und Elektronik-Altgeräte 96/2002

Dieses Produkt unterliegt Bestimmungen der Europäischen Union, die die Wiederverwendung und das Recycling von gebrauchten Elektro- und Elektronikgeräten fördern. Dieses Produkt erforderte die Gewinnung und Verwendung von natürlichen Ressourcen und enthält unter Umständen gefährliche Stoffe. Das oben abgebildete Symbol auf dem Produkt oder der Verpackung bedeutet, dass dieses Produkt nicht mit Ihrem anderen Haushaltsabfall entsorgt werden darf. Statt dessen sind Sie dafür verantwortlich, Ihr Altgerät zu entsorgen, indem Sie es an eine designierte Rücknahmestelle für das Recycling von Elektro- und Elektronik-Altgeräten übergeben. Die separate Sammlung und das Recycling Ihrer Altgeräte bei der Entsorgung wird dazu beitragen, natürliche Ressourcen zu erhalten und sicherzustellen, dass die Geräte in einer Weise recycelt werden, die die Gesundheit der Menschen und die Umwelt schützt. Für weitere Informationen darüber, wo Sie Ihre Altgeräte zum Recycling abgeben können, wenden Sie sich bitte an Ihre Gemeinde, Ihre Haushaltsabfallsortungsstelle oder das Geschäft, wo Sie das Produkt erworben haben. Für weitere Informationen über Monster-Produkte, besuchen Sie uns bitte auf www.MonsterCable.com.

Ελληνικά



Πληροφορίες στους καταναλωτές κατ' εφαρμογή της Οδηγίας 2002/96/EK σχετικά με τα απόβλητα ειδών ηλεκτρικού και ηλεκτρονικού εξοπλισμού (ΑΗΗΕ)

Αυτό το προϊόν υπόκειται στους κανόνες της Ευρωπαϊκής Ένωσης οι οποίοι προωθούν την αξιοποίηση και ανακύλωση του μεταχειρισμένου ηλεκτρικού και ηλεκτρονικού εξοπλισμού. Για αυτό το προϊόν απαιτήθηκε η εξαγωγή και χρησιμοποίηση φυσικών πόρων και σε αυτό μπορέ να περιέχονται επικίνδυνα συστατικά. Το παραπάνω σύμβολο, επάνω στο προϊόν ή στη συσκευασία του, υποδεικνύει ότι αυτό το προϊόν δεν πρέπει να διατίθεται μαζί με τα υπόλοιπα οικιακά απόβλητα. Αντ' αυτού, αποτελεί δική σας ευθύνη η διάθεση των απόβλητων ειδών ηλεκτρικού και ηλεκτρονικού εξοπλισμού σας, παραδίδοντάς τα σε ειδικό σημείο συλλογής για την ανακύλωση των απόβλητων ειδών ηλεκτρικού και ηλεκτρονικού εξοπλισμού. Η ξεχωριστή συλλογή και ανακύλωση των απόβλητων ειδών ηλεκτρικού και ηλεκτρονικού εξοπλισμού σας την ώρα της διάθεσης θα βοηθήσει τη διατήρηση των φυσικών πόρων και θα εξασφαλίσει την ανακύλωσή τους με τέτοιο τρόπο ώστε να προστατευθεί η ανθρώπινη υγεία και το περιβάλλον. Για περισσότερες πληροφορίες σχετικά με το πώ μπορείτε να παραδώσετε τα απόβλητα ειδών ηλεκτρικού και ηλεκτρονικού εξοπλισμού σας προς ανακύλωση, παρακαλώ επικοινωνήστε με το αρμόδιο τοπικό γραφείο, την υπηρεσία διάθεσης οικιακών αποβλήτων ή το κατάστημα από το οποίο προμηθευτήκατε το προϊόν. Για περισσότερες πληροφορίες σχετικά με τα προϊόντα Monster, παρακαλώ επισκεφθείτε μας στην ηλεκτρονική διεύθυνση www.MonsterCable.com.

Lietuvių Kalba



Informacija vartotojams apie ES Direktyvos 2002/96/EB d l elektros ir elektronin s rango atliek (EE A) talkym

Šiam gaminui taikomi ES reikalavimai, skatinantys panaudotos elektros ir elektronin s rango pakartotin panaudojim ir perdibrim . Šio produkto gamybai yra panaudoti išgauti gamtiniai ištekliai, taip pat ju sud tyje gal bti pavojing medžiag . Aukš iau pateiktas simbolis ant paties gaminio arba ant jo pakuo s rodo, kad šio gaminio negalima išmesti kartu su kitomis buitin mis atliekomis. J s patys atsakote už tai, kad J s elektros ir elektronin s rango attiekos b t perduotos perdibrimi tam skirtus surinkimo punktus. Atskiras J s išmetamas rango atliek surinkimas ir perdibimas pad s išsaugoti gamtinius išteklius ir užtikrins, kad jos bus perdibamos žmoni sveikatai ir aplinkai saugiu b du. Papildomas informacijos apie tai, kur galite palikti savo rango attiekas perdibimui, prašome teirautis savo mesto seni nijoje, buitin atliek šalinimo tarnyboje, arba parduotuv je, kurioje pirkote gamin. Daugiau informacijos apie „Monster“ prekes ieškokite internete: www.MonsterCable.com.

Norsk



Informasjon til forbrukere i henhold til EU-direktiv 96/2002

Dette produktet er underlagt virkeområdet for EU-regelverk som oppfordrer til gjenbruk og resirkulering av brukt elektrisk og elektronisk utstyr. Fremstilling av dette produktet har gjort det nødvendig å utvinne og bruke naturressurser som kan være skadelige. Det ovenstående symbolet, på produktet eller på pakningen, betyr at produktet ikke må kastes sammen med annet husholdningsavfall. I stedet er det ditt ansvar å innlevere brukt utstyr som skal kastes til et mottakssted for brukt elektrisk og elektronisk utstyr. Innsamling og resirkulering av ditt brukte elektriske og elektroniske utstyr som skal kastes vil bidra til vern av naturressursene og sikre at utstyret resirkuleres på en måte som hindrer helsekader og skader på miljøet. For mer informasjon om hvor du kan levere brukt utstyr for resirkulering, kan du kontakte din lokale kommune eller forhandleren der du kjøpte produktet. For mer informasjon om Monster-produktene, se www.MonsterCable.com.

MONSTER®

MonsterCable.com

© 2006 Monster Cable Products, Inc.
455 Valley Drive • Brisbane, CA 94005, USA • 1-877-800-8989

Monster Cable International Ltd.
Ballymaley Business Park
Gort Road, Ennis, Co. Clare, Ireland • 001-866-348-4171

rm 876430

HIGH DEFINITION POWERCENTER™ HDP 1850G

Maximize Home Theater Performance and Protect Equipment from Power Surges and Spikes



POWERCENTER™ HAUTE DÉFINITION HDP 1850G

Optimisez les performances de votre cinéma maison et protégez vos appareils des crêtes de courant et des surtensions



HIGH DEFINITION POWERCENTER™ HDP 1850G

Maximize Home Theater Performance and Protect Equipment from Power Surges and Spikes



- 1 Phone Line Surge Suppressor
- 2 Network Line Surge Suppressor
- 3 Satellite Surge Suppressor
- 4 Cable Surge Suppressor
- 5 T2™ Microprocessor Controlled Disconnect/Reconnect Circuitry
- 6 Tri-Mode® Disconnect Circuitry with Audible and Visual Alarm
- 7 Precision Voltage Meter
- 8 Current Sensing Circuitry

MONSTER HD CLEAN POWER®

- 9 Isolated High Current Filter
- 10 Isolated Digital Filter
- 11 Isolated High Definition Digital Filters
- 12 5526 Joules Full Capacity Surge Suppressor
- 13 Advanced Ceramic Encased MOVs for Superior Fire Protection
- 14 RF Remote Control Circuitry
- 15 Microprocessor Logic Control Circuitry



- 1 Suppression des surtensions sur la ligne téléphonique
- 2 Suppression des surtensions sur la ligne de réseau
- 3 Suppression des surtensions pour satellite
- 4 Suppression des surtensions dans le câble
- 5 Déconnexion et reconnexion grâce aux circuits T2™ commandés par microprocesseur
- 6 Circuits de déconnection Tri-Mode® avec alarme sonore
- 7 Computeur de Tension de Precision
- 8 Circuit de détection actuel

MONSTER HD CLEAN POWER®

- 9 Filtre isolé à courant élevé
- 10 Filtre numérique isolé
- 11 Filtres numériques isolés haute définition
- 12 Suppression pleine capacité des surtensions 5526 Joules
- 13 Varistances à oxyde métallique évoluées enrobées de céramique pour une protection supérieure contre l'incendie
- 14 Circuit de télécommande RF
- 15 Microprocesseur avec circuits à commande logique




- 1 8 isolated, filtered HD Clean Power® outlets
- 2 Monster GreenPower™ control outlet
- 3 Monster GreenPower controlled outlets
- 4 2 PLC compatible/RF Monster GreenPower controlled outlets
- 5 Surge protected phone connection with splitter
- 6 1 pair surge protected network connections
- 7 Resettable 15 amp circuit breaker
- 8 1 pair ultra-low loss 2.8GHz satellite connections
- 9 1 pair cable TV connections
- 10 Extra-long 8 ft, high current PowerLine® 100 cable




- 1 8 sorties HD Clean Power isolées et filtrées
- 2 Prise Monster GreenPower™ Control
- 3 Prises commandées Monster GreenPower
- 4 2 Prises commandées RF Monster GreenPower/ CPL compatibles
- 5 Connexions téléphoniques avec doubleur de prise, protégées contre les surtensions
- 6 1 paire de connexions de réseau protégées contre les surtensions
- 7 Disjoncteur 15 A réinitialisable
- 8 1 paire de connexions pour satellite 2,8 GHz à pertes minimales
- 9 1 paire de connexions pour TV
- 10 Très long cordon d'alimentation (8 pi) PowerLine® 100 haute puissance

POWERCENTER HAUTE DÉFINITION HDP 1850G

Optimisez les performances de votre cinéma maison et protégez vos appareils des crêtes de courant et des surtensions

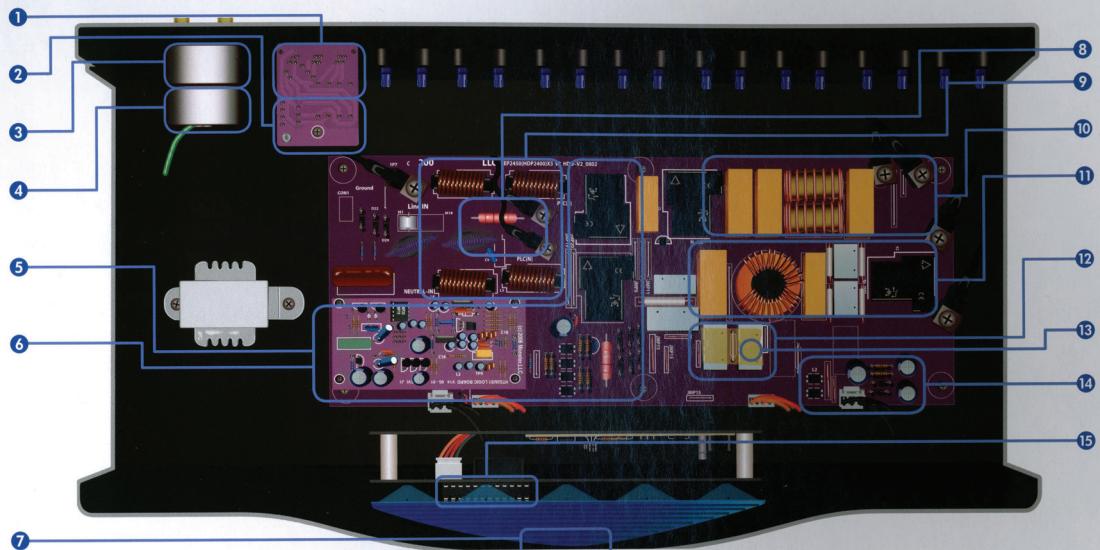

Actual product may vary from illustration, not shown to scale • Le produit réel peut différer de l'illustration, non représenté à l'échelle

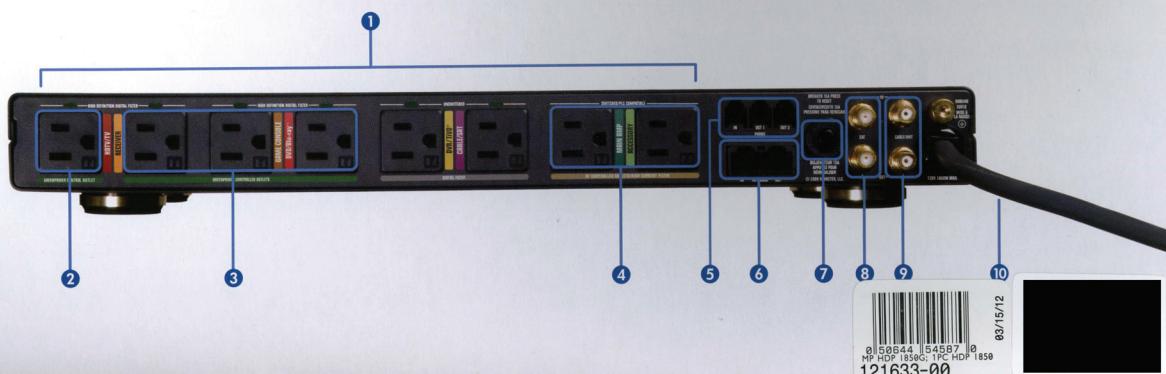

0158544 545B
MHD1850G HDP 1850
121633-00
801512



© 2009 Monster, LLC
7251 West Lake Mead Blvd.
Las Vegas, NV 89128, USA
1-877-800-8959

Monster Technology International Ltd.
Ballymaley Business Park,
Gort Road, Ennis, Co. Clare, Ireland

Designed in the USA and manufactured for Monster to its quality specifications. Made in China.
Conçu aux États-Unis et fabriqué pour Monster selon ses spécifications de qualité. Fabriqué en Chine.

The Monster Power HDP 1850G is protected under the following patents • Le Monster Power HTS 1700 est protégé par les brevets suivants:

US 5,589,718; 6,473,510 B1; 6,683,770 B1; 6,614,636 B1; 6,829,129 B2; 7,262,945 B2; D443,250; D447,119

TAIWAN NI-130119; N1-171813; N1-165023; I223486; CHINA ZL99107639.7.

Other Patents Pending • Autres brevets en instance.

Monster, Monster Power, the Monster Power logo, T2, Tri-Mode, Clean Power, Monster GreenPower, the Monster GreenPower logo, PowerLine, the warranty logos, the RoHS logo, the technology badges, the product and packaging are trademarks or registered trademarks of Monster Cable Products, Inc. and its subsidiaries in the US and other countries. Blu-ray Disc is a trademark of Sony Kabushiki Kaisha Corp. TiVo is a registered trademark of TiVo, Inc.

« Monster », « Monster Power », le logo Monster Power, « T2 », « Tri-Mode », « Clean Power », « Monster GreenPower », the Monster GreenPower logo, « PowerLine », les logos de la garantie, les logos de la RoHS, les insignes technologiques, ainsi que le produit et l'emballage sont des marques de commerce ou des marques de commerce déposées de Monster Cable Products, Inc. et de ses filiales aux États-Unis et dans d'autres pays. Blu-ray Disc est une marque de commerce de Sony Kabushiki Kaisha Corp. TiVo est une marque de commerce de TiVo, Inc.



The packaging is recyclable. Recycling programs for this package may not exist in your area.
Cet emballage est recyclable. Des programmes de recyclage pour cet emballage pourraient ne pas être disponibles dans votre région.

rm 176218