



BY PRO-JECT AUDIO SYSTEMS

# INSTRUCTIONS FOR USE

## Pro-Ject Power Box RS Amp

Dear music lover,

thank you for purchasing a Pro-Ject Audio Systems Power Box RS Amp.

In order to achieve maximum performance and reliability you should study these instructions for use carefully.



*Warning of a hazard for the user, the unit or possible misuse.*



*Important notice.*

## Safety instructions


*AC outlet voltages vary from country to country. Before connecting to the mains, make sure that the voltage in your area meets the voltage requirements printed on the device.*

*Never handle the device while your hands are wet or damp.*



*Avoid letting liquids enter the device. Never place any item containing liquid, such as a flower vase on or near the device. Never spill any liquid on the device or cables. Never place any naked flame sources, such as lighted candles on or near the device. The product shall not be used in damp or wet locations, next to a bathtub, sink, swimming pool or any other similar conditions.*

## Connecting Power Box RS Amp

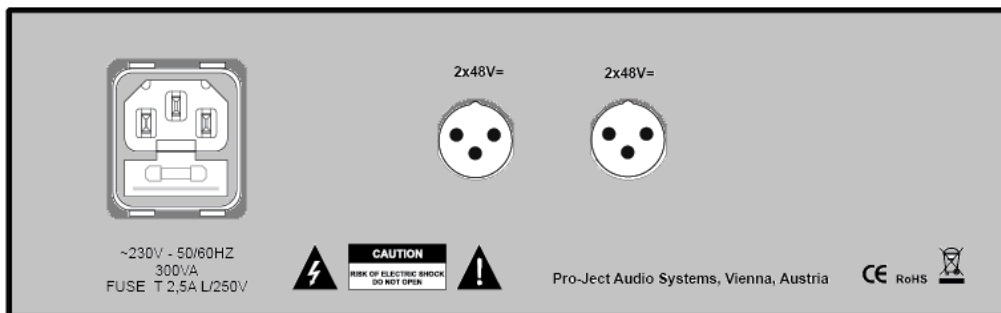

Connect the power cable to the unit and to the mains. Then use special supplied cable to connect the Power Box RS Amp with the amplifier(s). Then the original power supply of the amplifier is no longer required.




*Make all connections whilst the Power Box RS Amp is **switched off or disconnected from the mains***

*Power Box RS Amp is designed only for Pro-Ject Audio Systems products with 2x48V power supply.*




*Amp Box DS, Amp Box DS Mono, Stereo Box RS, Amp Box RS, Amp Box RS Mono and for any future product with 2x48V power supply. Products with different input voltage cannot be used with the Power Box RS Amp.*


**Connection to one amplifier**  
Any of listed Pro-Ject amplifiers  
can be connected




**Connection to two amplifiers**  
Connect only mono versions of the  
amplifiers

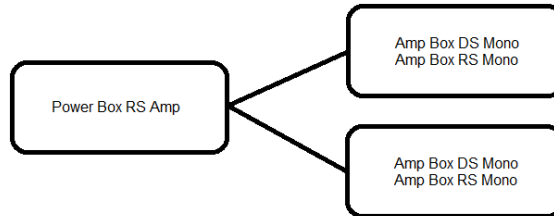

**Incorrect use**  
Power Box RS Amp is not designed  
to drive two stereo amplifiers

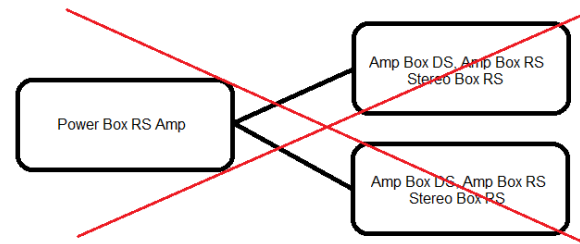

## Main power switch

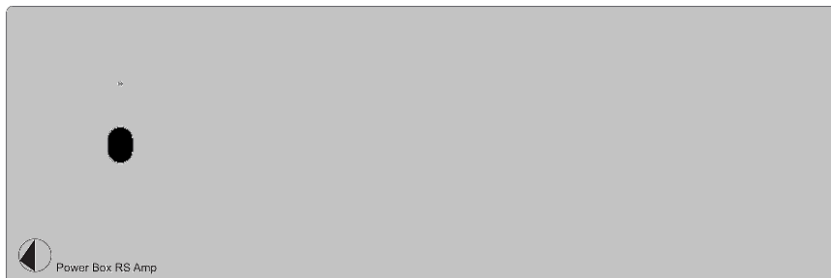

The toggle switch on the left side will turn the unit on or off. The blue LED above the switch shows that the unit is switched on.

## Technical specifications Pro-Ject Power Box RS Amp

Input voltage:	AC 230V/50Hz IEC C15 connector (120V/60Hz US version)
Output voltage:	two outputs by 2 x 48V / 2.5A DC each
Filtration capacity:	40.000 µF
Output voltage ripple:	7mV peak to peak
Dimensions W x H x D:	201 x 72 x 195mm
Weight:	4,8kg

## Service

Should you encounter a problem which you are not able to alleviate or identify, please contact your dealer for further advice. Only if the problem cannot be resolved there, the unit should be sent to the responsible distributor in your country.

## Warranty



*The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or changes to any part of the product by unauthorized persons release the manufacturer from any liability over and above the lawful rights of the customer.*

## Copyright, trademarks

Pro-Ject Audio Systems is a registered Trademark of H. Lichtenegger.

This guide was produced by: Pro-Ject Audio Systems  
Copyright © 2014. All rights reserved.

The information was correct at the time of going to press. The manufacturer reserves the right to make changes to the technical specification without prior notice as deemed necessary to uphold the ongoing process of technical development.